PP/01/01472 AD(1)

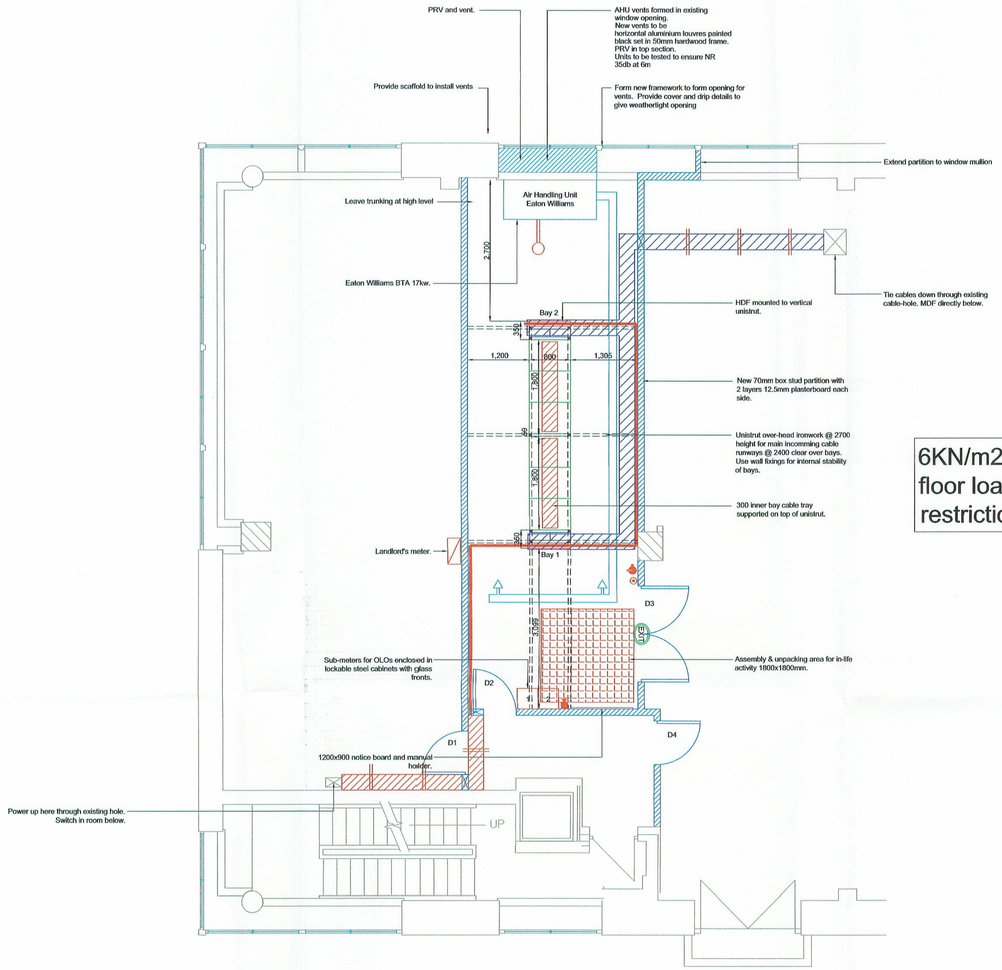

Hostel Area
33.7m²

Floor ceiling height 4.32m

6KN/m2
floor load
restriction

Door No.	D1	D2	D3		D4
Standard (BSUP B,SorH: or swhw ply faced)	SW ply face	SW ply face	SW ply face	SW ply face	SW ply face
Size.	838x2100	838x2100	838x2400	838x2400	838x2100
FDS (30 or 60)	FD30	FD60	FD60	FD60	FD30
BSUP hinges	-	-	-	-	-
BSUP gap guard	-	-	-	-	-
Vision Panel	(05.13)	(05.13)	-	-	(05.13)
Tower bolts	-	-	(07.12)x2	(07.12)x2	-
Kick plate	x2	x2	x2	x2	x2
Closer	(05.08)	(05.08)	-	-	(05.08)
Lever	(07.09)	-	-	-	-
Vision panel grilles	(05.14)	(05.14)	-	-	(05.14)
Exit dead lock	-	(07.09)	-	-	Unican
Cylinder with thumb turn.	-	-	-	-	-
Mortice Dead Lock	Unican	-	-	-	Unican

( ) Denotes BT security specification reference.

PP011472

R.B.K.& C.
TOWN PLANNING
2 JUL 2001
RECEIVED

Key -

- BT AC power distribution trunking.
- BT AC power distribution basket (300mm)
- BT HDF-MDF Internal ties basket.
- EXIT Emergency exit light box.
- EXIT Fire exit sign.
- Fire alarm call point.
- 2kg CO2 exstinguisher on wall brackets with suitable signage.
- Air discharge grilles with opposed blade dampers discharging air vertically downwards, fed from new ductwork suspended from ceiling at high level.
- Cooling unit control sensor.
- New Partition
- Fire Alarm Sounder
- Smoke Detector

Notes -

Signage - Relevant fire extinguisher identification sign to be provided over extinguisher. Fire action sign to be mounted in prominent position adjacent to final exits. Fire exit signs to BS5499 and EC Dir. 92/58/EEC.
Hostel signage to be provided to main door.

Fire Detection - VESDA will not be provided at this hostel. Fire detection to be provided via fixed head optical units, location and number to be confirmed by ADT. Local alarm panel, manual call point(s) and sounder within hostel to be provided. New alarm to be linked to existing building alarm system.

Cable Apertures - All new and existing cable apertures to be fully fire stopped to provide 2 hour fire resistance, in accordance with Bldg. Regs. and BT fire stopping details. Ref. SFY/CSP/B049.

PEMP - The PEMP alarm monitoring platform will not be provided at this hostel. Meter(s) to be read via anew PSTN link obtained through BTP.

Lighting - Lighting to provide 400lux at floor level.
Provide 2 no. emergency fittings within hostel and 1 no. in new corridor.

Electrical - Provide 1 no. twin 13amp socket outlet beneath distribution board to each bay. Distribution board to be 4 way, 32a, 3 phase unit with 12 fuse positions to head of each bay, on MDF backboard.

Decorations - New partition to be provided with mist coat and 2 coats emulsion paint. New joinery/metalwork to be primed and receive 2 coats undercoat and 1 coat full gloss paint.
Internal parts of hostel to be decorated as follows;-

Existing plaster/board surfaces (wall & ceiling) - 2 coats emulsion paint.
New plaster - mist coat and 2 coats emulsion paint.
Existing woodwork/metalwork - 1 coat undercoat and 2 coats gloss paint.
New woodwork/metalwork - primer, 2 coats undercoat and 1 coat gloss paint.

Flooring - Retain existing composite wood block floor.

Partitioning - New partitioning to be 1.5hr fire rating GYPROC metal stud partitioning.

Client

British Telecommunications plc.

Project

BT OLO Co-Location Programme
West Kensington ATE

Drawing

Proposed Second Floor Plan
Uncommitted

WestKensington-001-2nd-Unc10.05.01(H)

Job No.	DWG No.		
Y0941	001		
Scale	Date	Drawn	Checked
1:50	10/05/01	LFE	

Lambert Smith Hampton

Building Consultancy

Aquila House
St Giles Terrace
Northampton NN1 2BN
Telephone 01604 230606
Fax 01604 231549
E Mail bsnpton@lsh.co.uk